## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau



# 

#### (43) International Publication Date 5 August 2004 (05.08.2004)

#### PCT

### (10) International Publication Number WO 2004/066677 A1

(51) International Patent Classification7:

H05B 3/74

(21) International Application Number:

PCT/GB2004/000119

(22) International Filing Date: 16 January 2004 (16.01.2004)

(25) Filing Language:

English

(26) Publication Language:

English


(30) Priority Data:

0301169.9

18 January 2003 (18.01.2003)

- (71) Applicant (for all designated States except US): CERA-MASPEED LIMITED [GB/GB]; Zortech Avenue, Oldington, Kidderminster, Worcestershire DY11 7DY (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LAMB, Stuart [GB/GB]; 42 Hunt End Lane, Redditch, Worcestershire B97 5UW (GB).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AB, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG. PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (84) Designated States (unless otherwise Indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

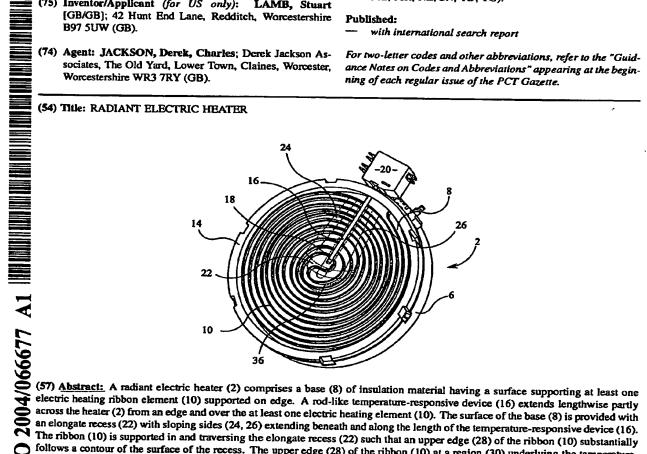

an elongate recess (22) with sloping sides (24, 26) extending beneath and along the length of the temperature-responsive device (16). The ribbon (10) is supported in and traversing the elongate recess (22) such that an upper edge (28) of the ribbon (10) substantially follows a contour of the surface of the recess. The upper edge (28) of the ribbon (10) at a region (30) underlying the temperatureresponsive device (16) is provided at a predetermined distance from the temperature-responsive device (16) and is at a lower level relative to the upper edge (28) of the ribbon (10) at regions at either side of the elongate recess (22).